

GUIDELINE FOR PRODUCT MANUAL TRANSPORTATION AND STORAGE

PRODUCT MANUAL


Ensure the safety during the loading by an appropriate way

The steel sheets have to be installed immediately after corrugated, otherwise the steel sheets have to be placed at least 20 cm from the floor to avoid direct contact. Store in a dry, clean, airy place.

During the storing, handling or installing, avoid pulling and sliding the corrugated steel sheets because it can cause scratches, stains or damages on the surface.

After installed, clean the roofs and all related objects, remove all the remaining iron filings, brick chips to avoid rust and make the roof cleaner, brighter.

Attention: always wear safety hard hats, belts, clothes, soft-soled shoes and tool bags for the best support during the roofing and ensure safety.

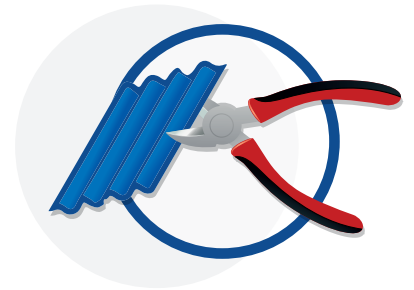


TRANSPORTATION

Line the shock-absorbing sheets at the contact points of steel coils with the pallet and between two steel coils.

The steel coils have to be carefully packed before delivery.

Should deliver in a dry weather condition.

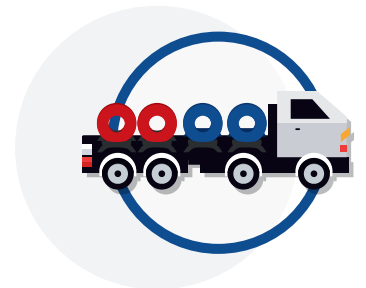

STORAGE

The storage place must be dry, airy and covered with roofs.

Keep away from electricity, heat sources and high oxidizing environments.

Do not stack the steel sheets.

